
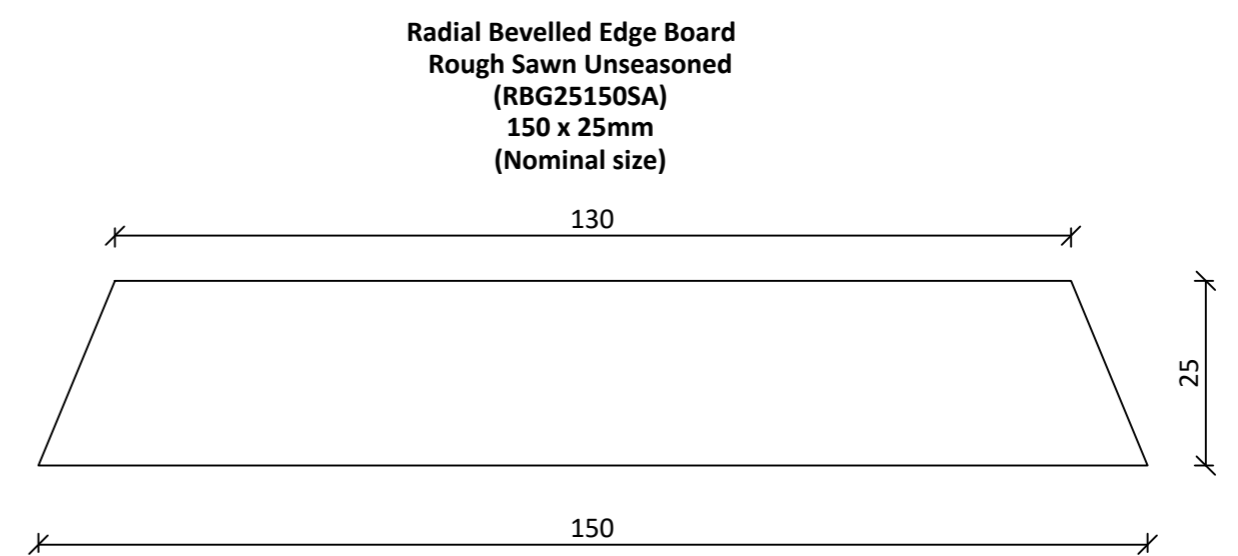
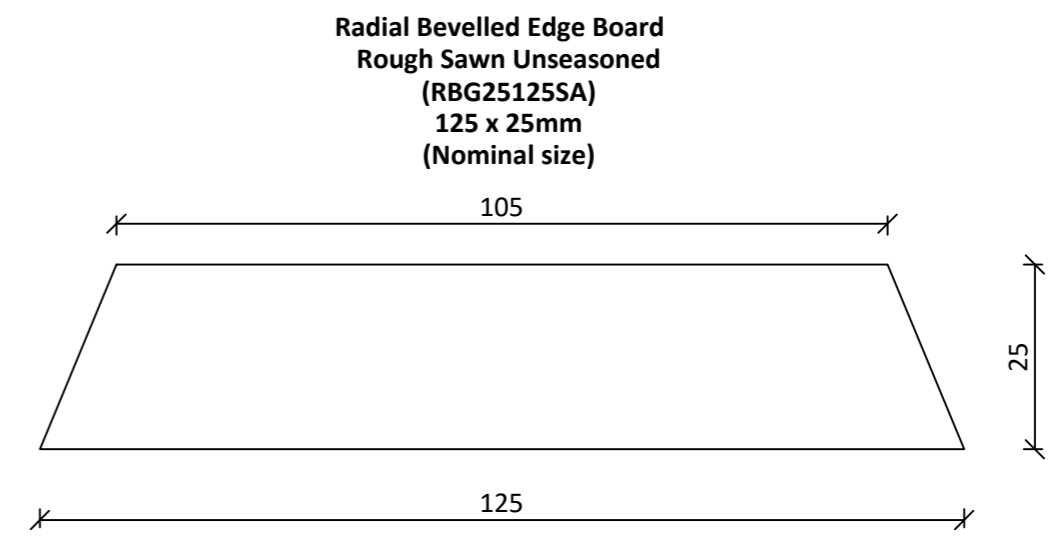
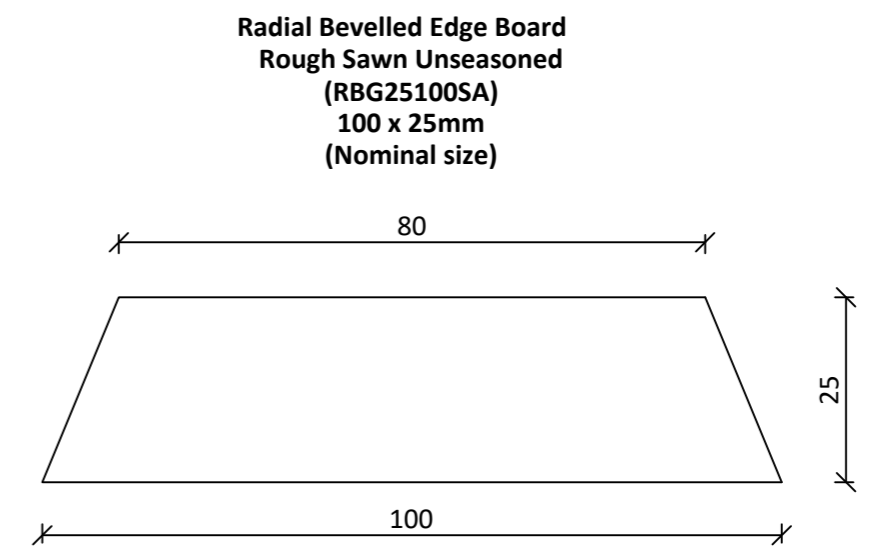
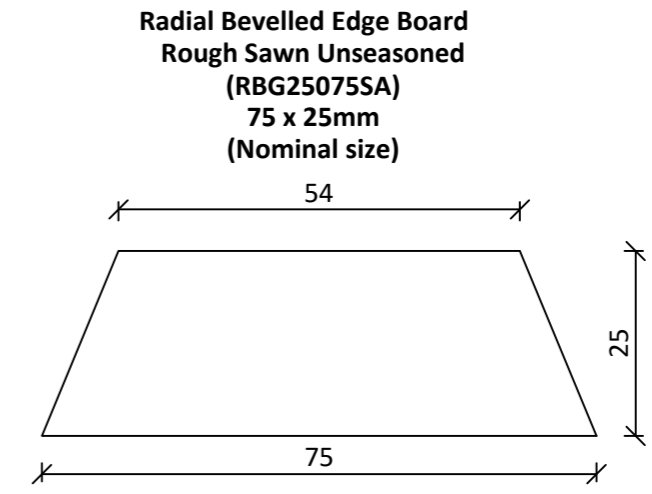


Note: Radial recommends a minimum of 25-30mm overlap of face boards
 (See Radial Timber fixing recommendation sheet)
 All Bevelled Edge rough sawn timbers are nominal size.

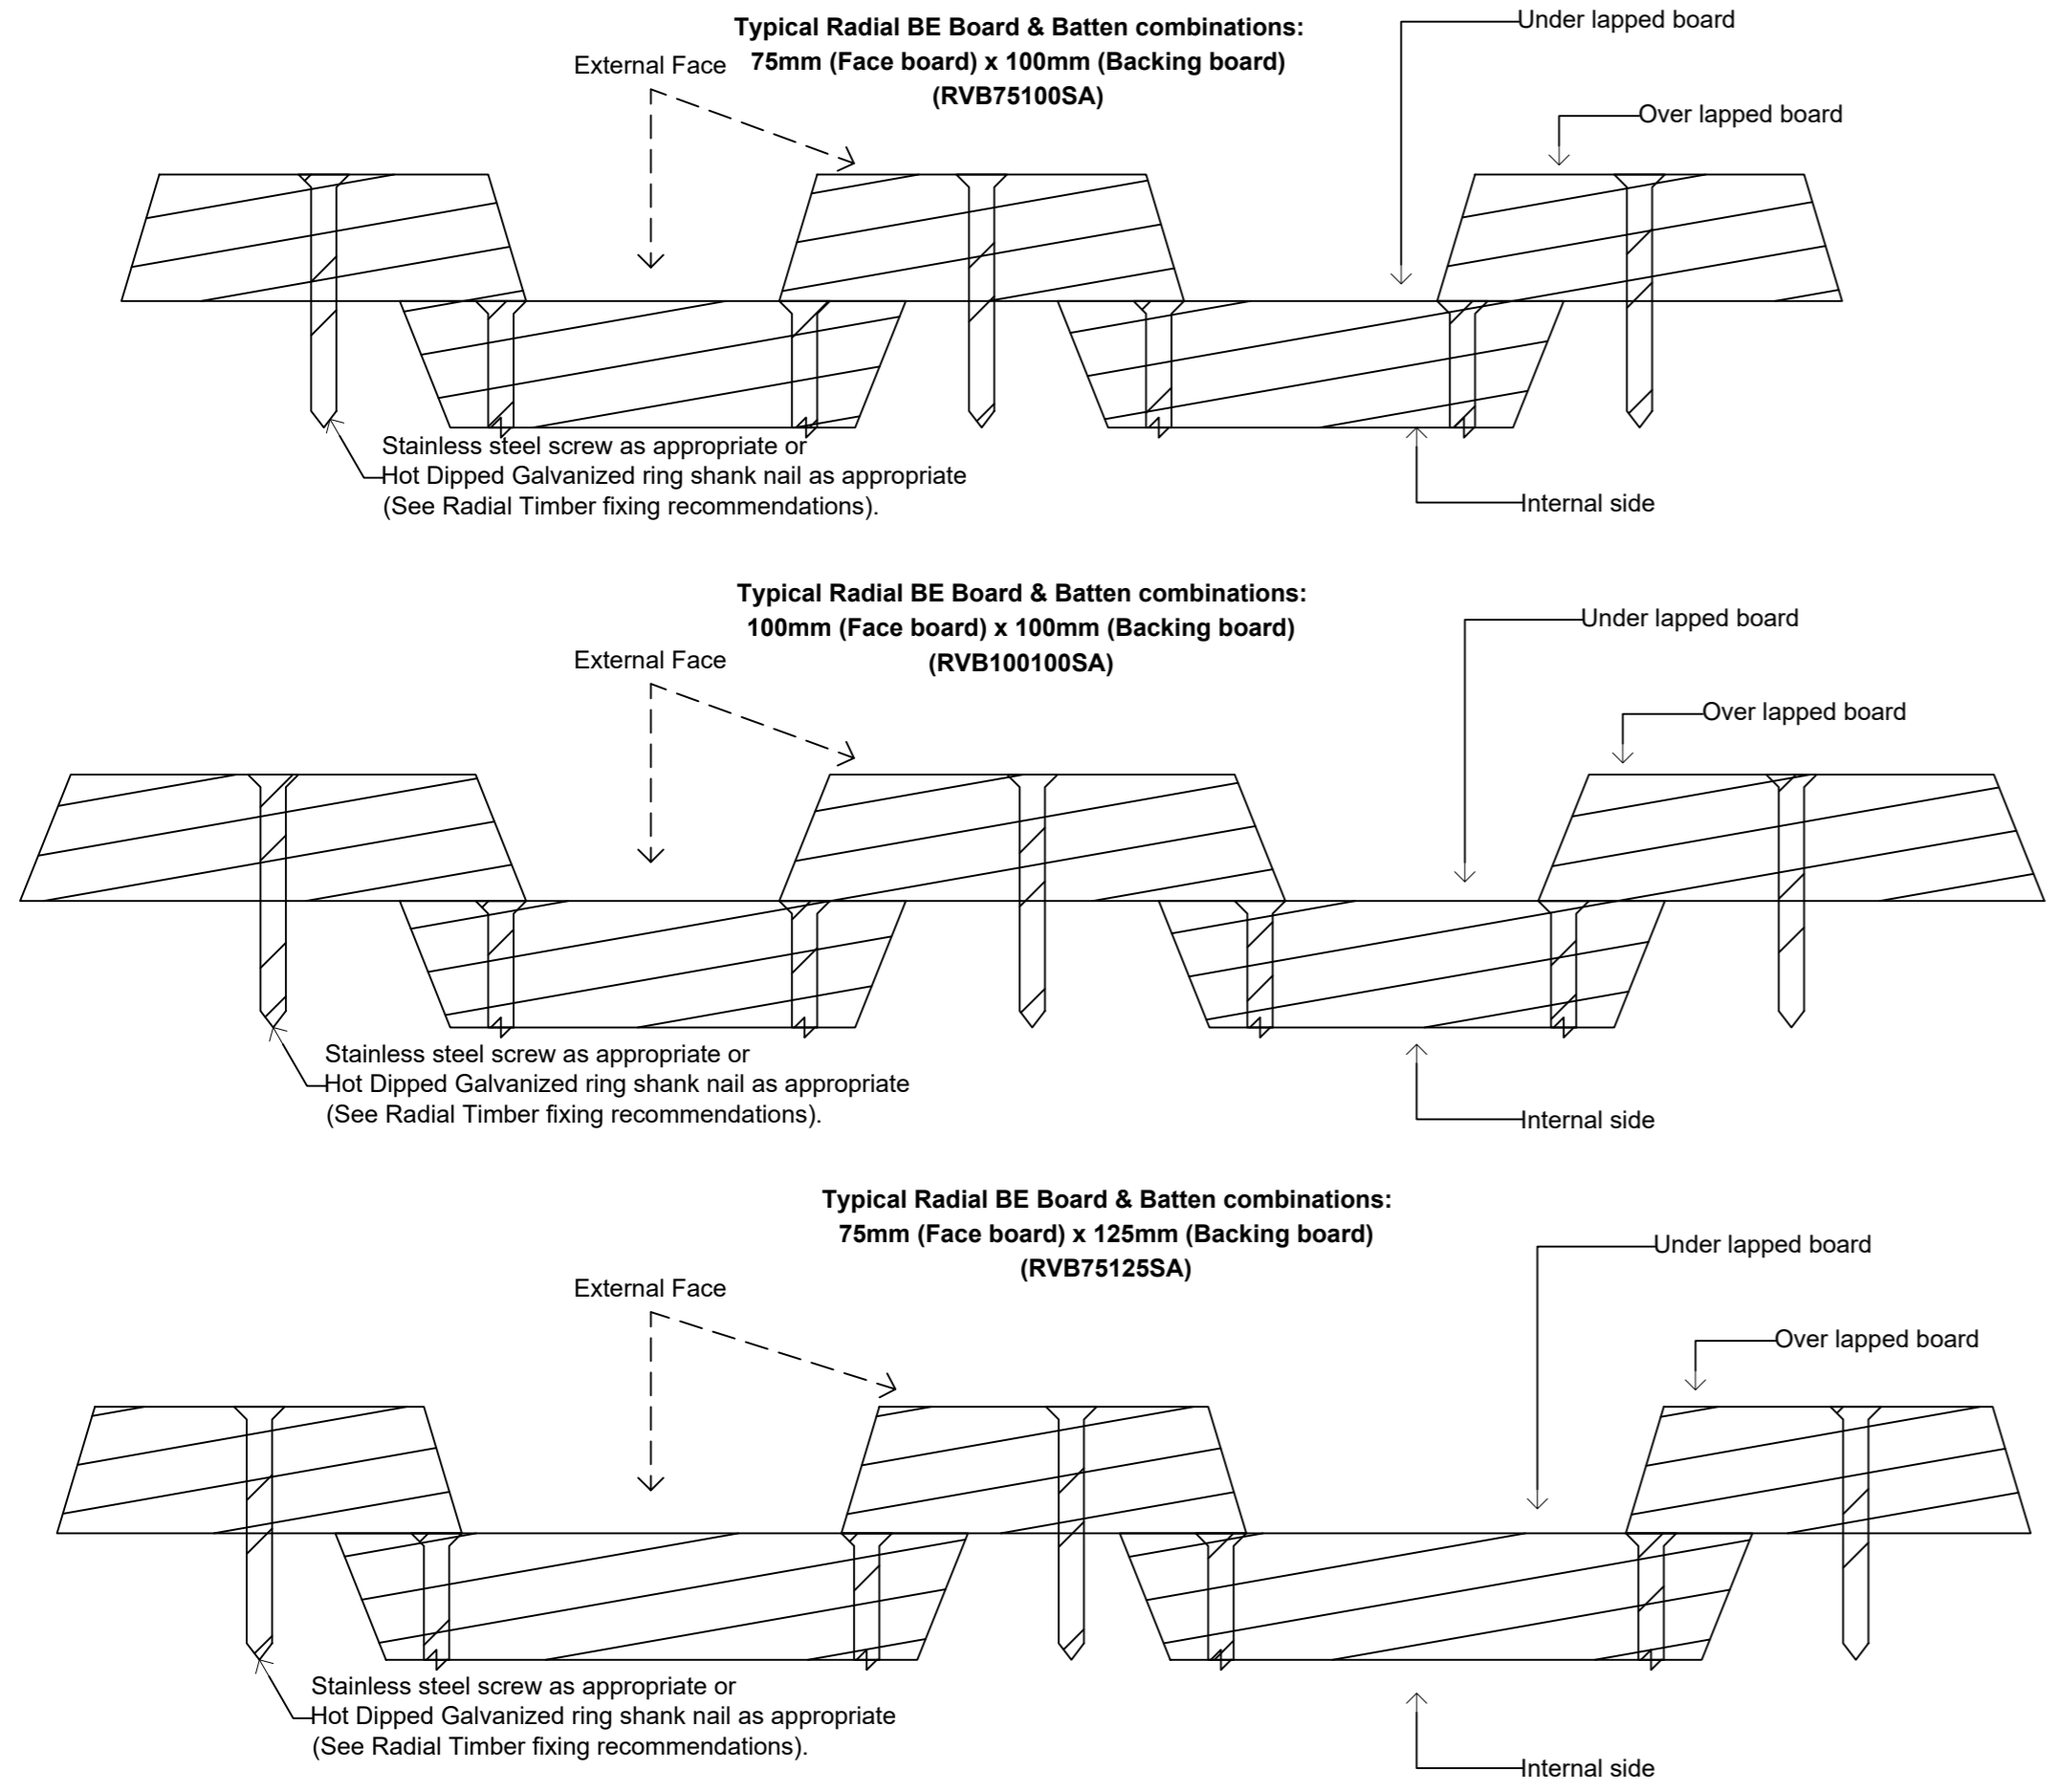

Radial Board & Batten Typical Profile (Bevelled Edge)
 Unseasoned Rough Sawn - Silvertop Ash:

(Left) - **Silvertop Ash** (Eucalyptus Sieberi) Bevelled Edge Board Unseasoned Rough Sawn - 75x25(Top) & 100x25mm (Bottom)
 (Rated bushfire resisting timber to maximum **BAL 29** as per **AS 3959**),
 Termite resistant (**AS 5604**) and natural durability rated as Class 2 above ground up to 25 years)

NOTES:
 THE BUILDER SHALL CHECK AND VERIFY ALL DIMENSIONS AND NOTIFY ALL ERRORS AND OMISSIONS TO THE DESIGNER. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION UNTIL ISSUED BY THE DESIGNER FOR CONSTRUCTION. DO NOT SCALE DRAWINGS. USE FIGURED DIMENSIONS ONLY.
FIXING DETAILS:
 REFER TO RADIAL TIMBERS RECOMMENDED FIXINGS (www.radialtimbers.com.au)

RADIAL TIMBER SALES
 12 PARK DRIVE,
 DANDENONG SOUTH 3175
 PH: (03) 9768 2100
 EMAIL: sales@radialtimbers.com.au
 WEB: www.radialtimbers.com.au



DRAWING NAME:
 Typical Bevelled Edge Board & Batten Rough Sawn Setout

SCALE: A2 - 1:1	DWG NO: RTS04/02
DATE: 13/2/22	REVISION: 02
DRAWN BY: RADIAL TIMBER	